

Portable Power Outlet

Safety Switch & Circuit Breaker Protected

- ✓ Dust & Moisture resistant highly.
- ✓ Rubber covers on rocker switch for weatherproof and electrical insulation.
- ✓ Neon indicator to show power on-off situation.
- ✓ Visible polycarbonate casing.
- ✓ Power outlets inset 12-15mm for added protection.
- ✓ Large sturdy base with fixing holes for strength & stability.
- ✓ Power cord can be fully wound onto unit.
- ✓ Totally sealed housing for weatherproof
- ✓ Double pole shuttered power outlets for safety.
- ✓

The Masta Safe Portable Power Outlet is your investment in electrical safety and security.

The RCD/MCB protected portable power outlet units have been designed in association with user trades people, and new innovations make this product user friendly and provide ultimate electrical safety for both operator and equipment.

The Masta Safe Portable Power Outlet is designed to protect the user against electrocution and costly power tools from severe electrical damage.

Masta Safe PRCD are manufactured by
Transco Electrical
www.transco.net.au

Masta Safe PRCD



Class H

Good for commercial, industrial use Complid with AS/NAS 3012

And complied to Construction /Demolition sites Standard

IP53

Patented socket outlet




Apprv. NSW21892

Portable Power Outlet

Safety Switch & Circuit Breaker Protected

Operating Instructions

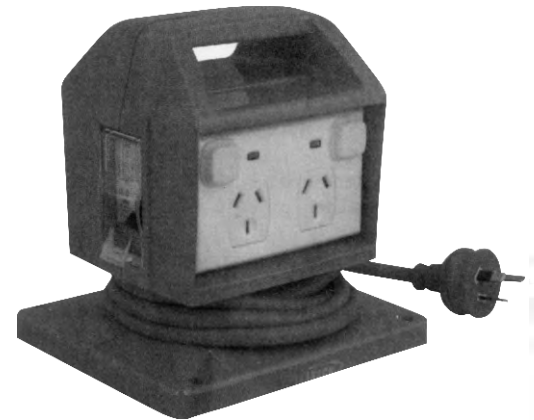

WARNING:

- Keep the unit away from petrol, chemicals, etc.
- Do not allow the unit to be dropped, immersed in water or other liquids. It could render the product unsafe and present a risk of fire or electrocution.
- This PRCD device will protect against fault to earth though the body, but not against active to neutral fault. Electricity can be dangerous and that the use of a PRCD should not be regarded as a substitute of or basic electrical safety precautions.
- Need to unplug equipment to achieve isolation before any inspection or repair of that equipment is attempted.
- Care should be taken with the use of extension lead, the PRCD should be connected direct into a socket outlet and ensure extension lead are plugged into the device secondary to connection of the Masta Safe PRCD to power supply.
- Do not operate unless cord fully unreeled.
- If supply cord is damaged, it shall be replaced by the manufacturer, service agent or similarly qualified person to avoid a hazard.
- If the device fails to trip or keep tripping, it may be faulty and should not be used, don't attempt any repairs.
You should seek advice from electrical contractor or manufacturer.

TEST BEFORE USE:

1. Plug the unit into a mains outlet and switch the toggle to the "on" position. (The toggle is located inside the clear protection cover)
2. Depress the "test button" to trip the unit off every time before you use the device and every 6 months. If the unit trips, the unit is deemed as functioning correctly, reset the toggle to on and proceed with its use.
WARNING: If the unit fails to trip or keep tripping, it may be faulty and should not be used, don't attempt any repairs.
You should seek advice from electrical contractor or manufacturer.
3. This is a 30mA device; leakage of 30mA or more will trip the unit off.
4. Care should be taken with the use of extension leads. Ensure these are plugged into the device secondary to connection of the Masta Safe PRCD power supply.

| Specifications/ Model | PPO10 | PPO15 |
|------------------------------------|------------|-------------|
| Rated Residual current | 30mA | 30mA |
| Number of power outlets | 4 | 4 |
| Length of power cord | 1.8Mts. | 1.8Mts. |
| Rated current | 10Amp | 15Amp |
| Rated voltage | 220/240 ac | 220/240V ac |
| Tripping time | | |
| Typical | 30ms | 30ms |
| Maximum | 50ms | 50ms |
| Operating temperature of RCD | | |
| Min. | -10deg C | -10deg C |
| Max. | +55deg C | +55deg C |
| Uses-Domestic | Yes | Yes |
| Uses-Commercial/Industrial | Yes | Yes |
| Uses-Construction/Demolition sites | Yes | Yes |
| Class | H | H |
| IP | 53 | 53 |

Product Warranty

The Masta Safe Portable Power Outlet is guaranteed against faults in materials & workmanship for a period of 12 months from date of purchase, provided the unit has not been used incorrectly, attached to the wrong power supply, tampered with or damaged after delivery. The Masta Safe does not contain any user serviceable parts. Our products must only carry out service requirements for the unit. You need to bring us the faulty product and purchase invoice under right guarantee for replacement.